




LLC NTN-SNR BEARINGS RUS

28 mm x 52 mm x 12 mm NTN 60/28LLU deep groove ball bearings

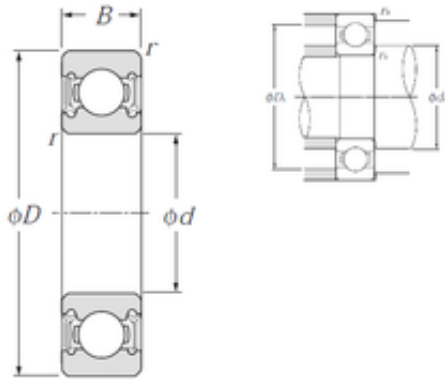

Bearing No. 60/28LLU

60/28LLU Bearing 2D drawings and 3D CAD models

Size	28x52x12 mm
Bore Diameter	28 mm
Outer Diameter	52 mm
Width	12 mm
d	28 mm
D	52 mm
B	12 mm
C	12 mm
r min.	0,6 mm
da min.	32 mm
da max	34 mm
Da max.	48 mm
ra max.	0,6 mm
Weight	0,098 Kg
Basic dynamic load rating (C)	12,5 kN
Basic static load rating (C0)	7,4 kN
Reference speed	8 400 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.096
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



LLC NTN-SNR BEARINGS RUS

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	28MM Bore; 52MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	60/28LLU/2AS
Weight / LBS	0.213
Outside Diameter	2.047 Inch 52 Millimeter
Bore	1.102 Inch 28 Millimeter
Outer Race Width	0.472 Inch 12 Millimeter
bore diameter:	28 mm
precision rating:	ISO Class 0
outside diameter:	52 mm
finish/coating:	Uncoated
overall width:	12 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round



LLC NTN-SNR BEARINGS RUS

cage material:	Steel
closure type:	Double Sealed
inner ring width:	12 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	12 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	8400 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	16000 RPM
dynamic load capacity:	12500 N
series:	60
static load capacity:	7400 N
manufacturer product page:	Click here